

LED Puck

• Damp location listed **PROGRESS LED**



Description:

The Hide-a-Lite V LED Puck provides an ideal solution for many applications. The low profile design provides versatility to allow installations inside a cabinet, under a cabinet and above a cabinet to provide up light. The Hide-a-Lite V LED Puck offers a quick and simple mounting installation and SPT-2 wire can be used for direct wiring. Energy Star Listed and meets CA T24 JA8-2016 requirements. The Hide-a-Lite V LED Pucks can be dimmed down to 10percent with many Forward Phase Triac and Electronic Low Voltage ELV dimmers. Antique Bronze finish.

Specifications:

- Antique Bronze (-020) (plated)
- Plastic Polymer construction Construction
- White polycarbonate diffuser
- Hide-A-Lite V LED puck low profile design provides versatility to allow installations inside a cabinet, under a cabinet and above a cabinet to provide up light
- Quick and simple mounting installation
- Dimmed down to 10% with many Forward Phase (Triac) and Electronic Low Voltage (ELV) dimmers
- SPT-2 wire can be used for direct wiring (P860029, P860030)
- 3000K, 90CRI and 140 lumens (delivered)
- Dimmable to 10% brightness (See Dimming Notes)
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Input Power	3w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	139/50 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	54,000 (L70/TM-21)
Min. Start Temp	-30 °C
Warranty	5 year warranty
Labels	cETLus Damp location listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016

P700005-020-30

Images:



Dimensions:

Diameter: 3"
Height: 1"

Photometrics:

P700005-020-30

ELECTRICAL DATA P700005-020-30

Input Voltage	120 V
Input Frequency	60 Hz
Input Current	
Input Power	3
Power Factor	
THD	<20%
FCC	
Operating Temperature	-30 °C to
Dimming	Yes*


*See Dimming Notes for more information

P700005-020-30

LED Light Engine: 3000 K 90 CRI
 System Wattage: 3
 Fixture delivered lumens: 139
 Fixture Efficacy: 50
 Spacing Criteria: 1.24

DEG	CANDELA	LUMENS
0	78.0	
5	78.0	8
15	81.0	23
25	83.0	38
35	69.0	42
45	25.0	21
55	1.0	2
65	0.0	0
75	0.0	0
85	0.0	0
90	0.0	

ZONAL ZONE	LUMEN LUMENS	SUMMARY %FIXT
0-30	69	51.3
0-40	111	82.9
0-60	134	100.0
0-90	134	100.0
90-180	0	0.0
0-180	134	100.0

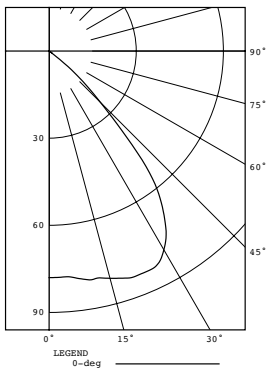

P700005-020-30**Dimming Notes:**

is designed to be compatible with many Triac/Forward Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron - NTEVL-300

Lutron - DVELV-300P

Lutron - DVCL-253P

Lutron - Caseta Wireless

Leviton - 6681

Leviton - 6672

Leviton - 6674

Lutron - AYCL-153P

Lutron - TGCL-153-PH

Lutron - AYLV-600P

Lutron - NTLV-600

Lutron - MAELV-601

Leviton - AWSMT-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.