



Features

- Made of lightweight double anodized aluminum
- Frosted lens protects light source while evenly diffusing light
- Field cuttable extrusion and lenses
- Aluminum provides excellent heat dissipation
- End caps provide a tailored look
- Mounting clips available for surface applications
- Compatible with most Trulux Tape Light

Available Lengths

39-3/8" (1 meter)

Available Finishes



Anodized Aluminum

Compatible Tape Light

- Trulux Single Color
- Trulux Tunable CCT (excludes Double Row)
- Trulux RGB / RGB+WW

TRULUX™ Pro 45 Extrusion


Double anodized, with high light transmitting lens options (sold separately) and PRO 45 ends for a finished look. This angular extrusion has a stronger, more refined presence than the other 45 degree channels, and can be assembled to be used outdoors. The PRO 45 really shines in window framing and as decorative accent lighting where the profile has visibility, but it also works for display cases and cabinets.

Best suited applications:

Display cases, window framing, shelving, cabinetry, accent lighting

Ordering Information

PE-PRO45-1M	Pro 45 Aluminum Extrusion
PE-PROLENS-FR-1M	Frosted Polycarbonate Lens
PE-PROLENS-UV-1M	Frosted Polycarbonate UV Lens
PE-PRO45-END	Pro 45 End Cap

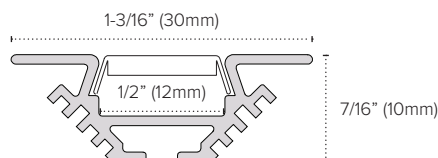

PRO 45
TRULUX EXTRUSIONS

TASK LIGHTING

DOWNLIGHTING

LINEAR LIGHTING

ARCHITECTURAL LIGHTING

POWER SUPPLIES

